



HOSHIZAKI

GNseries





Hoshizaki GN series Counter Refrigerator

Drawer is suitable for 1/1GN pan

Drawers can be custom made to door upon client's request.

Model	RTC-90DDA-GN-3D	RTC-90DDA-GN-2D
External Dimensions(mm)	900×750×800	900×750×800
Internal Dimensions(mm)	530×583×588	530×583×588
Capacity (L)	176	176
Temperature range	-6℃~12℃	-6℃~12℃
Power consumption(W)	225	225
Voltage	220V 50Hz Single phase	220V 50Hz Single phase







Model	FTC-90DDA-GN-3D	FTC-90DDA-GN-2D
External Dimensions(mm)	900×750×800	900×750×800
Internal Dimensions(mm)	530×583×588	530×583×588
Capacity (L)	176	176
Temperature range	-23℃~7℃	-23℃~7℃
Power consumption(W)	415	395
Voltage	220V 50Hz Single phase	220V 50Hz Single phase

Model	RTC-125DDA-GN-6D	RTC-125DDA-GN-4D
External Dimensions(mm)	1250×750×800	1250×750×800
Internal Dimensions(mm)	880×583×588	880×583×588
Capacity (L)	294	294
Temperature range	-6℃~12℃	-6℃~12℃
Power consumption(W)	315	315
Voltage	220V 50Hz Single phase	220V 50Hz Single phase

Model	FTC-125DDA-GN-6D	FTC-125DDA-GN-4D
External Dimensions(mm)	1250×750×800	1250×750×800
Internal Dimensions(mm)	880×583×588	880×583×588
Capacity (L)	294	294
Temperature range	-23℃~7℃	-23℃~7℃
Power consumption(W)	560	560
Voltage	220V 50Hz Single phase	220V 50Hz Single phase

Model	RTC-167DDA-GN-9D	RTC-167DDA-GN-6D
External Dimensions(mm)	1670×750×800	1670×750×800
Internal Dimensions(mm)	1300×583×588	1300×583×588
Capacity (L)	436	436
Temperature range	-6℃~12℃	-6℃~12℃
Power consumption(W)	315	315
Voltage	220V 50Hz Single phase	220V 50Hz Single phase

Model	FTC-167DDA-GN-9D	FTC-167DDA-GN-6D
External Dimensions(mm)	1670×750×800	1670×750×800
Internal Dimensions(mm)	1300×583×588	1300×583×588
Capacity (L)	436	436
Temperature range	-23℃~7℃	-23℃~7℃
Power consumption(W)	619	619
Voltage	220V 50Hz Single phase	220V 50Hz Single phase




Hoshizaki GN series

Counter Refrigerator


Drawer is suitable for 1/1GN pan

Glass door can be custom made upon client's request (refrigerator only)


Model	RTC-90SDA-GN	FTC-90SDA-GN
External Dimensions(mm)	900X750X800	900X750X800
Internal Dimensions(mm)	530X576X588	530X576X588
Capacity (L)	180	180
Temperature range	-6°C~12°C	-25°C~7°C
Power consumption(W)	215	398
Voltage	220V 50Hz Single phase	220V 50Hz Single phase



Model	RTC-125SDA-GN	FTC-125SDA-GN
External Dimensions(mm)	1250X750X800	1250X750X800
Internal Dimensions(mm)	880X583X588	880X583X588
Capacity (L)	301	301
Temperature range	-6°C~12°C	-25°C~7°C
Power consumption(W)	315	560
Voltage	220V 50Hz Single phase	220V 50Hz Single phase



Model	RTC-167SDA-GN	FTC-167SDA-GN
External Dimensions(mm)	1670X750X800	1670X750X800
Internal Dimensions(mm)	1300X576X588	1300X576X588
Capacity (L)	436	436
Temperature range	-6°C~12°C	-25°C~7°C
Power consumption(W)	315	619
Voltage	220V 50Hz Single phase	220V 50Hz Single phase



Hoshizaki GN series

reach-in

Drawer is suitable for 2/1 & 1/1GN pan

Glass door can be custom made upon client's request (refrigerator only)


Model	HRE-70B-CHD-GN	HRE-70B-CLD-GN
External Dimensions(mm)	700X850X1990	700X850X1990
Internal Dimensions(mm)	596X676X1484	596X676X1484
Capacity (L)	630	630
Temperature range	-6°C~12°C	-6°C~12°C
Power consumption(W)	302	302
Voltage	220V 50Hz Single phase	220V 50Hz Single phase




Model	HFE-70B-CHD-GN	HFE-70B-CLD-GN
External Dimensions(mm)	700X850X1990	700X850X1990
Internal Dimensions(mm)	596X676X1484	596X676X1484
Capacity (L)	630	630
Temperature range	-25°C~-7°C	-25°C~-7°C
Power consumption(W)	481	481
Voltage	220V 50Hz Single phase	220V 50Hz Single phase



Model	HRE-140B-CHD-GN	HRE-140B-CLD-GN
External Dimensions(mm)	1400X850X1990	1400X850X1990
Internal Dimensions(mm)	1296X676X1484	1296X676X1484
Capacity (L)	1370	1380
Temperature range	-6°C~12°C	-6°C~12°C
Power consumption(W)	438	438
Voltage	220V 50Hz Single phase	220V 50Hz Single phase



Model	HFE-140B-CHD-GN	HFE-140B-CLD-GN
External Dimensions(mm)	1400X850X1990	1400X850X1990
Internal Dimensions(mm)	1296X676X1484	1296X676X1484
Capacity (L)	1360	1370
Temperature range	-25°C~-7°C	-25°C~-7°C
Power consumption(W)	658	658
Voltage	220V 50Hz Single phase	220V 50Hz Single phase



Hoshizaki GN Series Combination List

The following information is for reference only.
Please consult our sales representative for more details.


Hoshizaki GN Series Counter Drawer



Hoshizaki GN Series Counter Refrigerator



Hoshizaki GN Series Reach-in Refrigerator

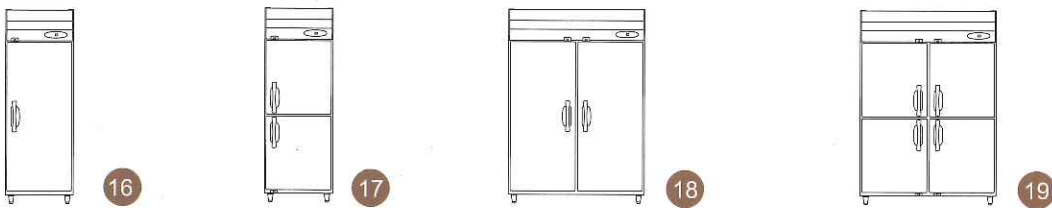

High efficiency, GN Series



GN series



- All models adapted to GN pan
- All models standardly equipped with built-in self-vaporized drip pan
- All models standardly equipped with door lock
- Internal and external materials adopt SUS304 stainless steel
- Accommodated ambient temperature up to +43°C
- Environmentally friendly refrigerant R134a (refrigerator), R404a (freezer)
- Environmental-friendly polyurethane foam
- Meet HACCP compliance requirement



* There will be no prior notice on the changes of product parameter.

HOSHIZAKI

星崎香港有限公司
HOSHIZAKI HONG KONG CO., LTD.

Unit 1201-02, 12/F, Tamson Plaza, 161 Wai Yip Street, Kwun Tong, KLN, H.K.
Tel.: 2866-2108 Fax: 2866-2109
URL: www.hoshizaki.com.hk
E-mail: jacklau@hoshizaki.com.hk